


# SC-DX-FW5-LCR 51/4" In-Wall LCR Speaker

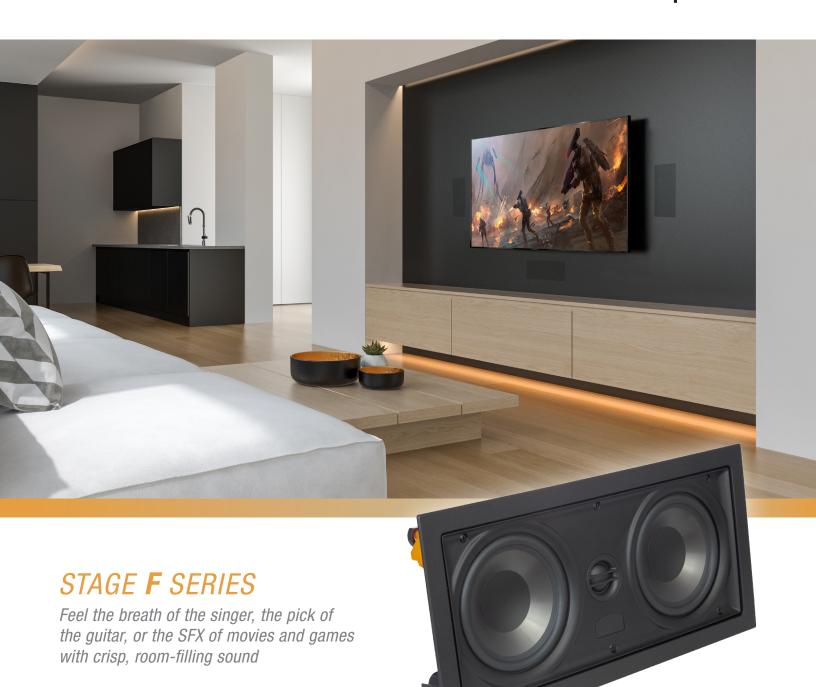

### Exceptional Clarity & Dynamics

Featuring two 5 1/4" injection molded polypropylene woofers and 1" aimable silk dome tweeter, the DX-FW5-LCR is ideal for music, movies, gaming and immersive sound applications where excellent performance and robust dynamics are required.

## SC-DX-FW5-LCR

## 51/4" In-Wall LCR Speaker (EACH)

### **Features**

#### Two 5 1/4" Injection Molded Polypropylene Woofers

Low crossover points and an angled woofer delivers the widest dispersion and best sound quality for LCR or distributed audio.

#### 1" Pivoting Silk Dome Tweeter

Silk dome tweeter delivers silky smooth highs which are pleasing to the ear.

#### Tilt Tweeter

The aimable tweeter allows you to direct sound to the listening area, even when the speaker is mounted in less than ideal locations.

#### Low Profile Grill

A thin-bezel magnetic grille ensures a secure fit, pleasing aesthetic—and with a one-step paint process, blends discreetly into any decor.

#### Secure Connection

All SpeakerCraft speakers feature spring loaded binding posts that provide a secure, worry-free connection in the wall or ceiling.

#### Timbre and Performance Matched

Expect consistent dynamic and detailed sound in every Stage F series speaker.





### Specifications

Woofer Size	Dual 5.25" (130mm)
Woofer Construction	Injection Molded Polypropylene Cone
Tweeter	1" (25mm) Pivoting Silk Dome
Frequency Response	48Hz-20kHz
Impedance	8 Ohms
Power Handling	110 Watts
Sensitivity	90 db
Timbre	Timbre-Matched to all F-Series Speakers
Dimensions	15.6" (396mm) Width x 7.76" (197mm) Height x 3.9" (99mm) Depth
Hole Cutout Dimensions	6.5" (157.2mm) Width 14.5" (369mm) Height
Depth Behind Wall	3.8" (96mm)

Use Pre-Construction Bracket Model #: EL-PCB-IWLCR-5





